

CODE	MODEL	TYPE	POWER SUPPLY	SERIES
897781	OSRE/40M	SALAMANDER	ELECTRIC	MILO SALAMANDERS

DESCRIPTION

FAST ELECTRIC SALAMANDER
TECHNICAL DATA

Electric power (kW)	3
Standard voltage* (kW)	230/1N/50-60
IPX Protection Grade (mm)	IPX4

DIMENSIONS DATA

Product dimensions (mm)	400W x 545 P x 518 H
Net weight (kg)	43
Gross weight (kg)	48
Packaging dimensions (m3)	700 x 400 x 545
Packaging volume (m3)	0.19


CONSTRUCTIONAL FEATURES

Exclusive heating system with the elements housed in a special reflecting ceramic dish and protected by a glass diffuser that increases heat transmission enabling cooking temperature to be reached in just 8 seconds. Cooking surface with stainless steel grill in GN sizes 2/3, 1/1 or 4/3. Control panel with a digital display for setting cooking times from 5 seconds to 15 minutes, in 5-seconds steps. At the end of the programmed cooking cycle, that can be stored in the memory for instant repetition, the salamander has autostop function with warning buzzer. Stainless steel wall mount supplied as standard | The 2 elements can be operated at maximum temperature, either both together or in alternating mode

ACCESSORIES(not included)


Code	Model	Description
nd9	ME_OSE/45M	WALL BRACKETS
nd10	ME_OSE/65M	WALL BRACKETS
nd11	ME_OSRE/40M	WALL BRACKETS
nd12	B_OSRE/40M	DRIP TRAY

CODE	MODEL	TYPE	POWER SUPPLY	SERIES
897781	OSRE/40M	SALAMANDER	ELECTRIC	MILO SALAMANDERS

DESCRIPTION

FAST ELECTRIC SALAMANDER

TECHNICAL DRAWING

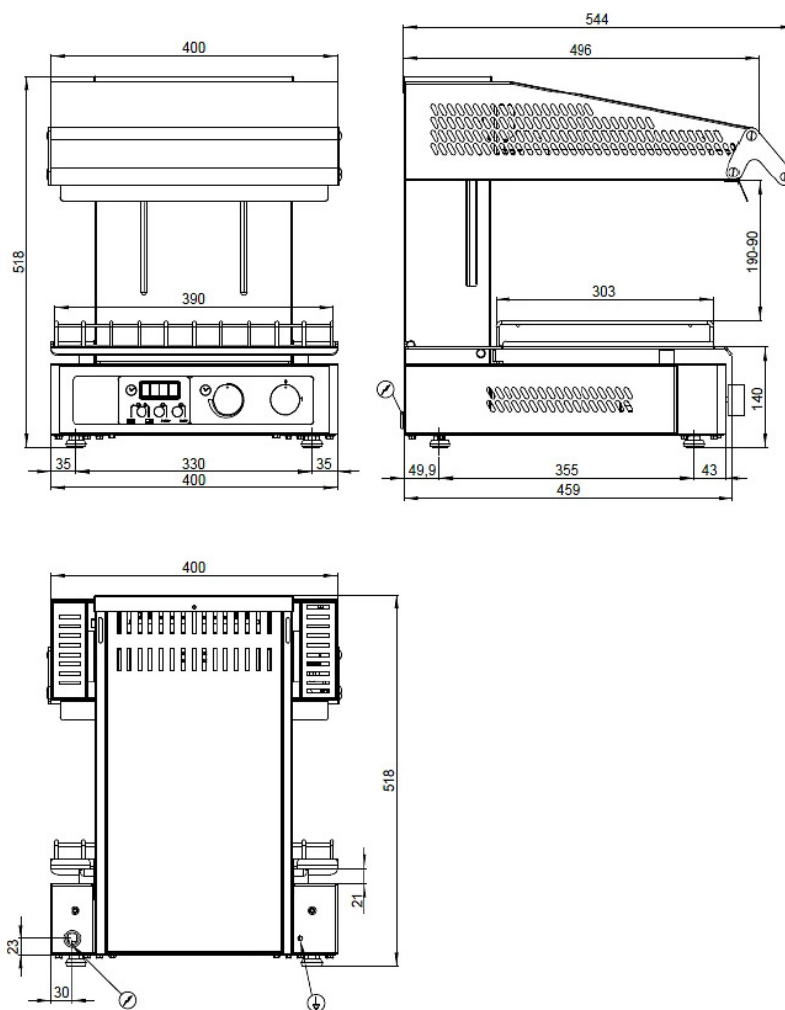

CONNECTIONS

E = ELECTRIC

230/1N/50-60