

| CODE | MODEL | TYPE | POWER SUPPLY | SERIES |
|-----------------|----------------|-----------------------|-----------------|-----------------|
| 11470006 | M7TCE2V | CERAMIC PLATES | ELECTRIC | MILO 700 |

DESCRIPTION

2 ZONES GLASS CERAMIC PLATE TOP
TECHNICAL DATA

| | |
|---------------------------|-----------------|
| Electric power (kW) | 5 |
| Standard voltage* (kW) | 380-415 V 3 N ~ |
| N° of cooking zones | 2x2,5kW |
| IPX Protection Grade (mm) | IPX4 |

DIMENSIONS DATA

| | |
|---------------------------|----------------------|
| Product dimensions (mm) | 400W x 730 P x 290 H |
| Net weight (kg) | 33 |
| Gross weight (kg) | 43 |
| Packaging dimensions (m3) | 430 x 972 x 624 |
| Packaging volume (m3) | 0.26 |


CONSTRUCTIONAL FEATURES

Worktop made of 2mm-thick AISI 304 stainless steel with Scotch Brite finish. Control panel, side panels and back panel in 1mm thick AISI 304 stainless steel with Scotch Brite finish. Precise juxtaposition of worktops ensuring maximum hygiene. Stainless steel brackets are provided as standard, allowing the appliances to be effectively fixed side by side (optional gasket). Sloping back guard, with built-in exhausted grate and removable steel closing grid. Adjustable feet with scratch-resistant sole made of insulating plastic material.

TECHNICAL FEATURES




6 mm thick glass ceramic plate, designed for flush alignment with hermetic gasket for easy cleaning. High-performance, tungsten heating elements. Ignition and power regulation by energy regulator. Sensors with glowing glass indicator lights. Ergonomic, athermic control knobs with built-in operating LED.

| CODE | MODEL | TYPE | POWER SUPPLY | SERIES |
|-----------------|----------------|-----------------------|-----------------|-----------------|
| 11470006 | M7TCE2V | CERAMIC PLATES | ELECTRIC | MILO 700 |


DESCRIPTION

2 ZONES GLASS CERAMIC PLATE TOP

TECHNICAL DRAWING

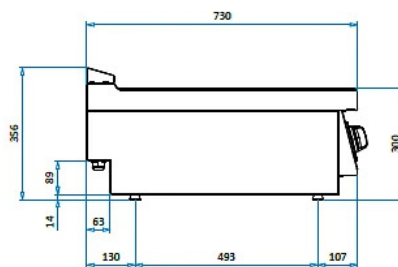

SEZIONE A - A



CONNECTIONS

E = ELECTRIC

380-415 V 3 N ~