

CODE	MODEL	TYPE	POWER SUPPLY	SERIES
<b>10971001</b>	<b>M7BRE50I</b>	<b>TILTING BRATT PAN</b>	<b>ELECTRIC</b>	<b>MILO 700</b>

## DESCRIPTION

**ELECTRIC BRATT PAN 1 TANK INOX 50 L (31dm2) MANUAL TILT**
**TECHNICAL DATA**

Electric power (kW)	8.7
Standard voltage* (kW)	380-415 V 3 N ~
N° of cooking zones	1x8,7kW
Tank dimensions (A) (mm)	724
Tank dimensions (B) (mm)	430
Tank height (mm)	170
Tank bottom surface (dm3)	31,,
N° of tanks	1x50lt
IPX Protection Grade (mm)	IPX4

**DIMENSIONS DATA**

Product dimensions (mm)	800W x 730 P x 900 H
Net weight (kg)	130
Gross weight (kg)	150
Packaging dimensions (m3)	845 x 972 x 1264
Packaging volume (m3)	1.04


**CONSTRUCTIONAL FEATURES**

Control panel, side and back panels in 1 mm thick AISI 304 stainless steel with Scotch Brite finish. Adjustable feet, in AISI 304 stainless steel, scratch-resistant sole made of insulating plastic material. Foot extension 60mm, standard worktop height 900mm (minimum 895, maximum 955).

**TECHNICAL FEATURES**


AISI 304 stainless steel cooking tank with 10mm thick bottom and 2mm thick walls. Manual tilting of the tank obtained by knurled knob made of athermic material and worm screw, motorized tilting on models (BR ... M). AISI 304 stainless steel closing lid, hinged at the rear and spring balanced. Water filling tap with swivel spout. Armoured heating elements with geometry and position designed to ensure maximum temperature uniformity on the plate. Thermostat for adjusting the cooking temperature from 100°C to 300°C. Safety thermostat with manual reset. Ergonomic, athermic control knobs with built-in operating LED.

CODE	MODEL	TYPE	POWER SUPPLY	SERIES
<b>10971001</b>	<b>M7BRE50I</b>	<b>TILTING BRATT PAN</b>	<b>ELECTRIC</b>	<b>MILO 700</b>

#### DESCRIPTION

**ELECTRIC BRATT PAN 1 TANK INOX 50 L (31dm<sup>2</sup>) MANUAL TILT**

#### TECHNICAL DRAWING

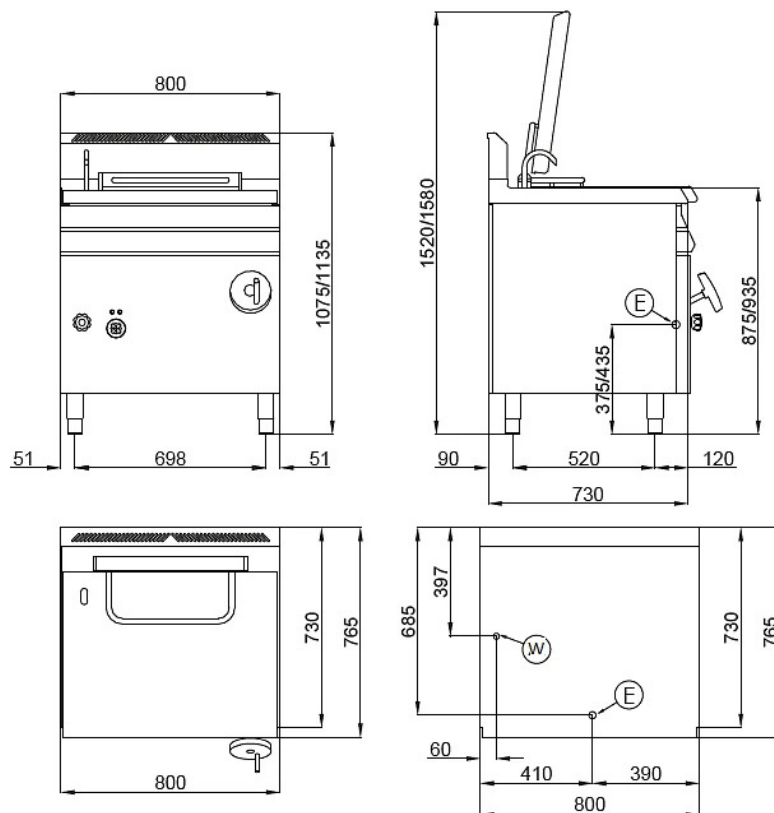

#### CONNECTIONS

E = ELECTRIC 380-415 V 3 N ~

W = WATER INLET ø12mm