

CODE	MODEL	TYPE	POWER SUPPLY	SERIES
<b>10972001</b>	<b>M7BRG50I</b>	<b>TILTING BRATT PAN</b>	<b>GAS</b>	<b>MILO 700</b>

## DESCRIPTION

**GAS BRATT PAN 1 TANK INOX 50 L (31dm<sup>2</sup>) MANUAL TILT**

## TECHNICAL DATA

Gas power (kW)	12,0
N° of cooking zones	1x12kW
Tank dimensions (A) (mm)	724
Tank dimensions (B) (mm)	430
Tank height (mm)	170
Tank bottom surface (dm <sup>2</sup> )	31,,
N° of tanks	1x50lt
IPX Protection Grade (mm)	IPX4

## DIMENSIONS DATA

Product dimensions (mm)	800W x 730 P x 900 H
Net weight (kg)	135
Gross weight (kg)	155
Packaging dimensions (m3)	845 x 972 x 1264
Packaging volume (m3)	1.04



## CONSTRUCTIONAL FEATURES

Control panel, side and back panels in 1 mm thick AISI 304 stainless steel with Scotch Brite finish. Adjustable feet, in AISI 304 stainless steel, scratch-resistant sole made of insulating plastic material. Foot extension 60mm, standard worktop height 900mm (minimum 895, maximum 955).

## TECHNICAL FEATURES


AISI 304 stainless steel cooking tank with 10 mm thick bottom and 20/10 thick walls. Manual tilting of the tank obtained by knurled knob made of athermic material and worm screw, motorized tilting on models (BR ... M). AISI 304 stainless steel closing lid, hinged at the rear and spring balanced. Water filling tap with swivel spout. Stainless steel burners with stabilized flame, temperature regulation from 100°C to 300°C by thermostatic valve with safety and thermocouple. Piezoelectric pilot ignition. Safety thermostat with manual reset. Ergonomic and athermic control knobs.

CODE	MODEL	TYPE	POWER SUPPLY	SERIES
<b>10972001</b>	<b>M7BRG50I</b>	<b>TILTING BRATT PAN</b>	<b>GAS</b>	<b>MILO 700</b>

DESCRIPTION

**GAS BRATT PAN 1 TANK INOX 50 L (31dm<sup>2</sup>) MANUAL TILT**

TECHNICAL DRAWING

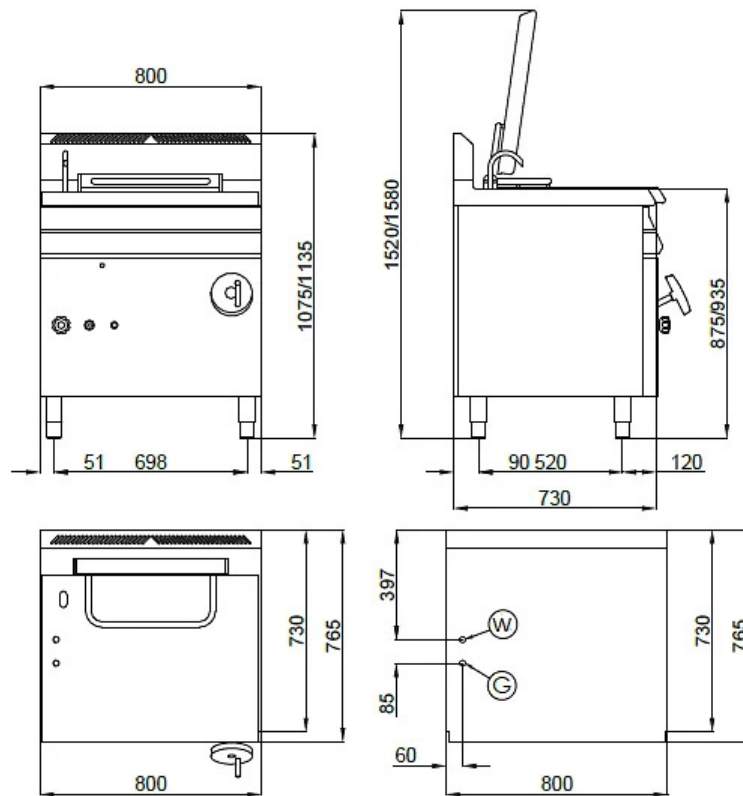

CONNECTIONS

G = GAS	Ø 1/2"
W = WATER INLET	Ø 12mm